

# AEM Electrolyser EL 4.0 LC




Enapter's patented anion exchange membrane (AEM) electrolyser is a standardised, stackable and flexible system to produce on-site hydrogen. The modular design – paired with advanced software integration – allows set up in minutes and remote control and management. Stack this electrolyser to achieve the required hydrogen flowrate.



AEM Electrolyser EL 4.0  
[www.enapter.com/aem-electrolyser](http://www.enapter.com/aem-electrolyser)

# Specifications

Enapter  
AEM Electrolyser EL 4.0 LC

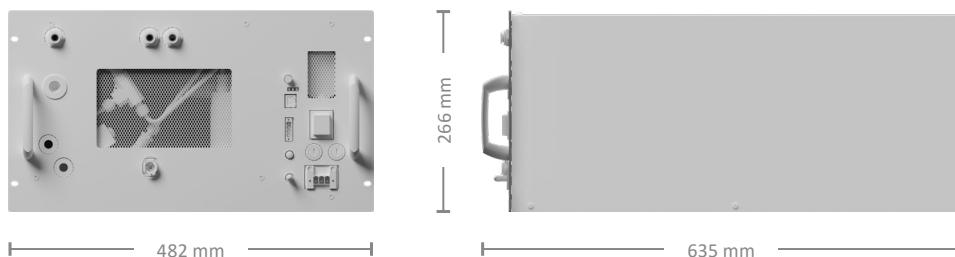

<b>Production rate</b>	Up to 500 NL/h, up to 1.0785 kg/24 h
<b>Hydrogen output purity</b>	35 barg: 99.9% (< 1,000 ppm H <sub>2</sub> O and < 5 ppm O <sub>2</sub> ) at 25 °C 8 barg: 98.8% (< 12,000 ppm H <sub>2</sub> O and < 5 ppm O <sub>2</sub> ) at 25 °C
<b>Output pressure</b>	Up to 35 barg
<b>Nominal power consumption per Nm<sup>3</sup> of H<sub>2</sub> produced</b>	4.8 kWh/Nm <sup>3</sup> , beginning of life
<b>Operative power consumption</b>	2.4 kW, beginning of life
<b>Peak power consumption</b>	3 kW
<b>Heat dissipation</b>	0.6 kW, beginning of life
<b>Max heat dissipation</b>	0.9 kW, end of life
<b>Standby power consumption<sup>1</sup></b>	0.3 kW
<b>Power supply</b>	220 – 240 V (AC), 50/60 Hz
<b>Maximum water input conductivity</b>	Minimum ASTM D1193-06 Type IV or recommended Type II or Type III <sup>2</sup>
<b>Water consumption</b>	~ 420 mL/h
<b>Water input pressure range</b>	1 – 4 barg
<b>Cooling water pressure range</b>	1 – 4 barg
<b>Cooling water temperature range</b>	5 °C – 40 °C <sup>3</sup>
<b>Cooling water flow</b>	1 – 2 L/min
<b>Ambient operative temperature range</b>	5 °C – 45 °C
<b>Ambient operative humidity range</b>	Up to 90% humidity, non-condensing
<b>IP rating</b>	IP 20
<b>Dimensions</b>	W: 482 mm × D: 635 mm × H: 266 mm
<b>Weight</b>	41 kg
<b>Space inside cabinet</b>	6 U
<b>Control and monitoring</b>	Fully automatic with Enapter's EMS via 2.4 GHz Wi-Fi and Bluetooth, Modbus TCP over Ethernet
<b>Conformity</b>	CE mark according to the machine directive 2006/42/CE <sup>4</sup> UKCA mark according to Supply Machinery (Safety) Regulations 2008 <sup>5</sup> CSA/ANSI B22734:2023 Ed.1 Hydrogen Generators Using Water Electrolysis - Industrial, Commercial, and Residential Applications <sup>6</sup>

<sup>1</sup> Standby refers to the condition in which no hydrogen is being produced and the auxiliary components are not powered.

<sup>2</sup> Please, check the Battery limits and the Owner's Manual for the complete requirements list

<sup>3</sup> Please, check the Owner's Manual for operational values

<sup>4</sup> The Electrolyser belongs to S.E.P. category according to Pressure Equipment Directive 2014/68/EU

<sup>5</sup> The Electrolyser belongs to S.E.P. category according to Pressure Equipment (Safety) Regulations 2016

<sup>6</sup> ETL recognized electrolyser versions only

Note: The product is under continuous improvement and the technical specifications might be subject to change. Please make sure to refer to our website for the most recent specifications.



AEM Electrolyser EL 4.0  
[www.enapter.com/aem-electrolyser](http://www.enapter.com/aem-electrolyser)